


Torqmax Split GRDH-SS HeavyDuty

Stainless steel | with groove

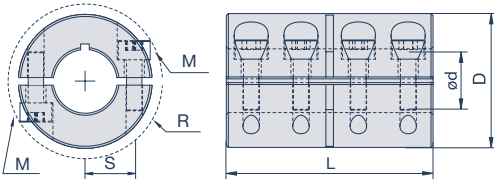

Specifications

Size Groove DIN 6885/1	d ₁ mm	d ₂ mm	D mm	L mm	S mm	R mm	M	T _A Nm	max. rpm min ⁻¹	T _{Kmax} Nm	g kg
GRDH-55kw-55kw-SS	55	55	120	220	50	124	M10	46	*	900	14,5
GRDH-60kw-60kw-SS	60	60	120	220	50	124	M10	46	*	1.000	13,8
GRDH-70kw-70kw-SS	70	70	140	250	55	140	M12	59	*	1.500	21
GRDH-80kw-80kw-SS	80	80	160	280	65	160	M12	59	*	2.050	30,5
GRDH-90kw-90kw-SS	90	90	180	310	70	180	M16	81	*	2.500	42,5
GRDH-100kw-100kw-SS	100	100	200	350	80	200	M16	81	*	3.800	59,9
GRDH-120kw-120kw-SS	120	120	250	430	105	250	M16	81	*	6.300	118

M= Screw size, T_A= Tightening torque, T_{Kmax}= Maximum clutch torque, g= Mass, S= Screw position, R= Space requirement

Bores in N7 fit

*If required, we can provide information on the maximum possible speeds. Please do get in touch.



„briefly and concisely ...
explained“

OUR PICTOGRAMS

	High temperature resistance		Corrosion resistant
	Various shaft diameters		Radially mountable
	Tight installation conditions		Low weight
	Maximum torque		Constructively balanced